


H Thread Drill Rod and Bit

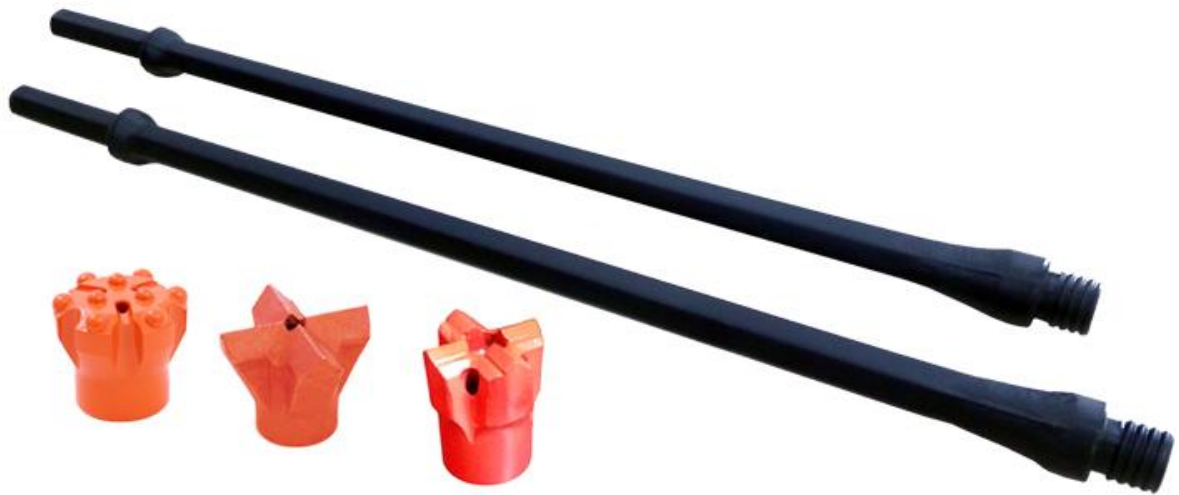

H thread steel is the most common steel and bits for customer using hand held rock drills.


"H" thread drill rod	Shank size: 7/8" x3 1/4" and 1"x 4 1/4" Length: 12"-144"
"H" thread drill bit	Type: TC cross bit, TC button bit, All steel bit Size: 1 3/8"- 3"

"H" Thread Drill Rods




Shank Size		Length		Weight		Part No.
inch	mm	inch	mm	lbs	kg	
7/8" x 3-1/4"	Hex.22×82.5	12"	304.8	3	1.36	10220812H
		18"	457.2	4	1.81	10220818H
		24"	609.6	5	2.27	10220824H
		30"	762	6	2.72	10220830H
		36"	914.4	7	3.18	10220836H
		48"	1219.2	9	4.08	10220848H
		60"	1524	11	4.99	10220860H
		72"	1828.8	14	6.35	10220872H
		96"	2438.4	18	8.16	10220896H
		120"	3048	22	9.98	102208120H
7/8" x 4-1/4"	Hex.22×108	12"	304.8	3.25	1.47	10221012H
		18"	457.2	4.25	1.93	10221018H
		24"	609.6	5.25	2.38	10221024H
		30"	762	6.25	2.83	10221030H
		36"	914.4	7.25	3.29	10221036H
		48"	1219.2	9.25	4.20	10221048H
		60"	1524	12	5.44	10221060H
		72"	1828.8	13.25	6.01	10221072H
1" x 4-1/4"	Hex.25×108	12"	304.8	4	1.81	10251012H
		18"	457.2	5	2.27	10251018H
		24"	609.6	7	3.18	10251024H
		30"	762	9	4.08	10251030H
		36"	914.4	10	4.54	10251036H
		48"	1219.2	12	5.44	10251048H
		60"	1524	15	6.80	10251060H
		72"	1828.8	18	8.16	10251072H
		96"	2438.4	23	10.43	10251096H
		120"	3048	28	12.70	102510120H
		144"	3657.6	33.5	15.20	102510144H


"H" Thread Drill Bits

TC Cross Bits	Diameter		Weight		Part No.
	inch	mm	lbs	kg	
	1-3/8"	35	0.44	0.20	3135HC
	1-1/2"	38	0.49	0.22	3138HC
	1-5/8"	41	0.57	0.26	3141HC
	1-3/4"	44	0.79	0.36	3144HC
	1-7/8"	48	0.84	0.38	3148HC
	2"	52	0.88	0.40	3152HC
	2-1/8"	54	1.06	0.48	3154HC
	2-1/4"	57	1.10	0.50	3157HC
	2-3/8"	60	1.32	0.60	3160HC
	2-1/2"	64	1.46	0.66	3164HC
	2-5/8"	67	1.59	0.72	3167HC
	2-3/4"	70	1.63	0.74	3170HC
	3"	76	2.10	0.95	3176HC


Note: 31→Cross Bit 30→Button Bit

Carbide Shallow Insert	Diameter		Weight		Part No.
	inch	mm	lbs	kg	
	1-3/8"	35	0.44	0.20	3135HS
	1-1/2"	38	0.49	0.22	3138HS
	1-5/8"	41	0.57	0.26	3141HS
	1-3/4"	44	0.79	0.36	3144HS
	1-7/8"	48	0.84	0.38	3148HS
	2"	52	0.88	0.40	3152HS
	2-1/8"	54	1.06	0.48	3154HS
	2-1/4"	57	1.10	0.50	3157HS
	2-3/8"	60	1.32	0.60	3160HS
	2-1/2"	64	1.46	0.66	3164HS
	2-5/8"	67	1.59	0.72	3167HS
	2-3/4"	70	1.63	0.74	3170HS
	3"	76	2.10	0.95	3176HS

Note: 31→Cross Bit 30→Button Bit

TC Button Bits	Diameter		Weight		Part No.
	inch	mm	lbs	kg	
	1-3/8"	35	0.49	0.22	3035HB
	1-1/2"	38	0.57	0.26	3038HB
	1-5/8"	41	0.66	0.30	3041HB
	1-3/4"	44	0.77	0.35	3044HB
	1-7/8"	48	0.88	0.40	3048HB
	2"	52	1.01	0.46	3052HB
	2-1/8"	54	1.06	0.48	3054HB
	2-1/4"	57	1.21	0.55	3057HB
	2-3/8"	60	1.43	0.65	3060HB
	2-1/2"	64	1.68	0.76	3064HB
	2-5/8"	67	1.77	0.80	3067HB
	2-3/4"	70	1.88	0.85	3070HB
	3"	76	2.10	0.95	3076HB

Note: 31→Cross Bit 30→Button Bit

All Steel Bits	Diameter		Weight		Part No.
	inch	mm	lbs	kg	
	1-3/8"	35	0.44	0.20	3135HA
	1-1/2"	38	0.51	0.23	3138HA
	1-5/8"	41	0.60	0.27	3141HA
	1-3/4"	44	0.71	0.32	3144HA
	1-7/8"	48	0.77	0.35	3148HA
	2"	52	0.82	0.37	3152HA
	2-1/8"	54	0.93	0.42	3154HA
	2-1/4"	57	1.04	0.47	3157HA
	2-3/8"	60	1.15	0.52	3160HA
	2-1/2"	64	1.26	0.57	3164HA
	2-5/8"	67	1.37	0.62	3167HA
	2-3/4"	70	1.50	0.68	3170HA
	3"	76	1.68	0.76	3176HA

Note: 31→Cross Bit 30→Button Bit



No matter what kinds of soft rock, loose-medium rock, hard rock and any other special formations, just tell us what you need, our special tailored service is waiting for you upon your demand.



MAXDRILL ROCK TOOLS CO., LTD

Add: No.14-16, 12/F, Building B6, Zhongjian Building, No.1 Luchongguan, Yunyan District, Guiyang City, Guizhou, China

Tel: 1-847-913-6878 +86-851-88639106

E-mail: office@kemaico.com info@kemaico.com

Web: www.maxdrillrocktools.com www.kemaico.com